




Dial Gauge, Flat Back, ISO Type
One Revolution, Shockproof, 1mm,
0,01mm

Item number: 1929AB

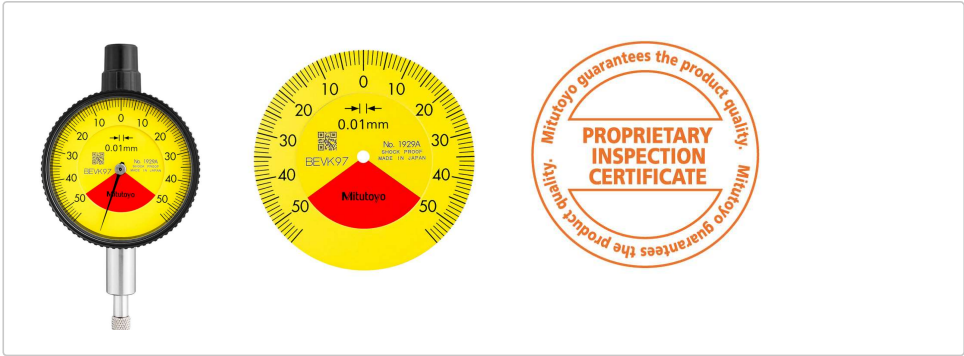


Description

- This is a compact, metric dial indicator. It offers you the following benefits:
- It is ideal for use in applications where space is limited.
 - It eliminates the possibility of reading errors due to miscounting multiple revolutions.

Features

Range:	1 mm (plunger stroke: 3,5mm)
Range per rev.:	1.4 mm
Graduation:	0.01 mm
Scale:	50-0-50
MPE any 1/10 revolution:	5 µm
MPE measuring range:	9 µm
H MPE (Hysteresis):	3 µm
R MPE (Repeatability):	3 µm
Measuring force:	0,4-1,4 N
Mass:	70 g
Balanced dial:	Yes
One revolution:	Yes
Shockproof:	Yes
Digital/Analog:	Analog
Inch-Metric:	Metric
Type:	EN ISO Standard
Stem:	8 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
Delivered:	with certificate of inspection

Dimensions

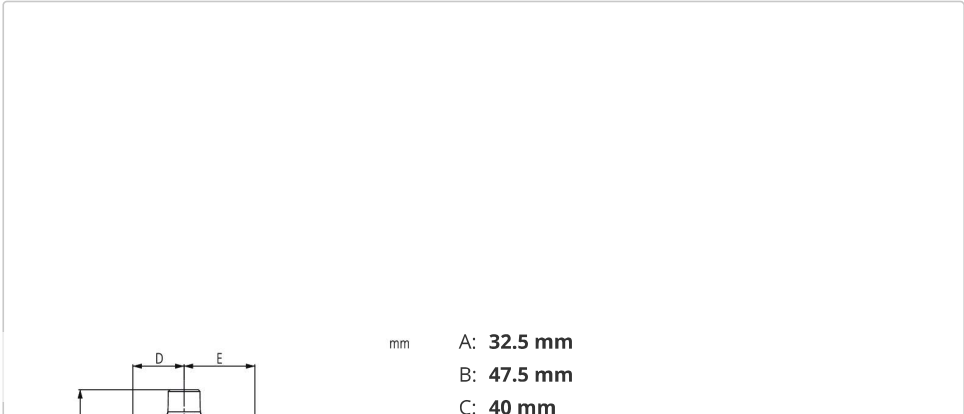



**Contact Element Ball Point, M2,5x0,45
7,3mm Length, Carbide, Metric
901312**